



**FLINT**

CERDOMUS ceramiche style



Flint Walnut: 30x60, 4,8x60 battiscopa, 4,7x4,7 mosaico Ice\_12"x24", 1,9"x24" skirting, 1,8"x1,8" Ice mosaic

**CERDIGITILES®**



RIVESTIMENTO

PAVIMENTO

MEDIA

IMPERMEABILE

INGELIVO

RESISTE

FACILE

A+B

R 10

C.O.F.

D. C.O.F.

RESISTE

POSA CON FUGA

# FLINT WALNUT

BORDO RETTIFICATO - RECTIFIED EDGE



**61717** 60x60\_24"x24"



**61724** mosaico Cream  
4,7x4,7\_1,8"x1,8"  
Walnut + Ivory  
(su rete 30x30\_12"x12")




**61733** 4,8x60\_1,9"x24" battiscopa




**61721** 30x60\_12"x24"



**61729** 33x60\_13"x24" gradino costa retta

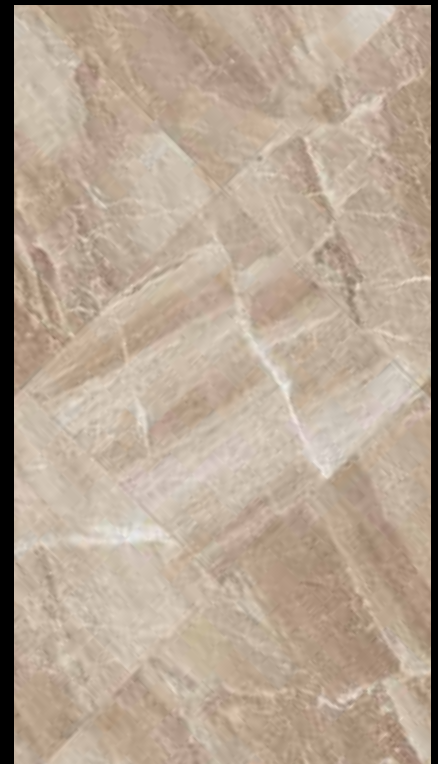

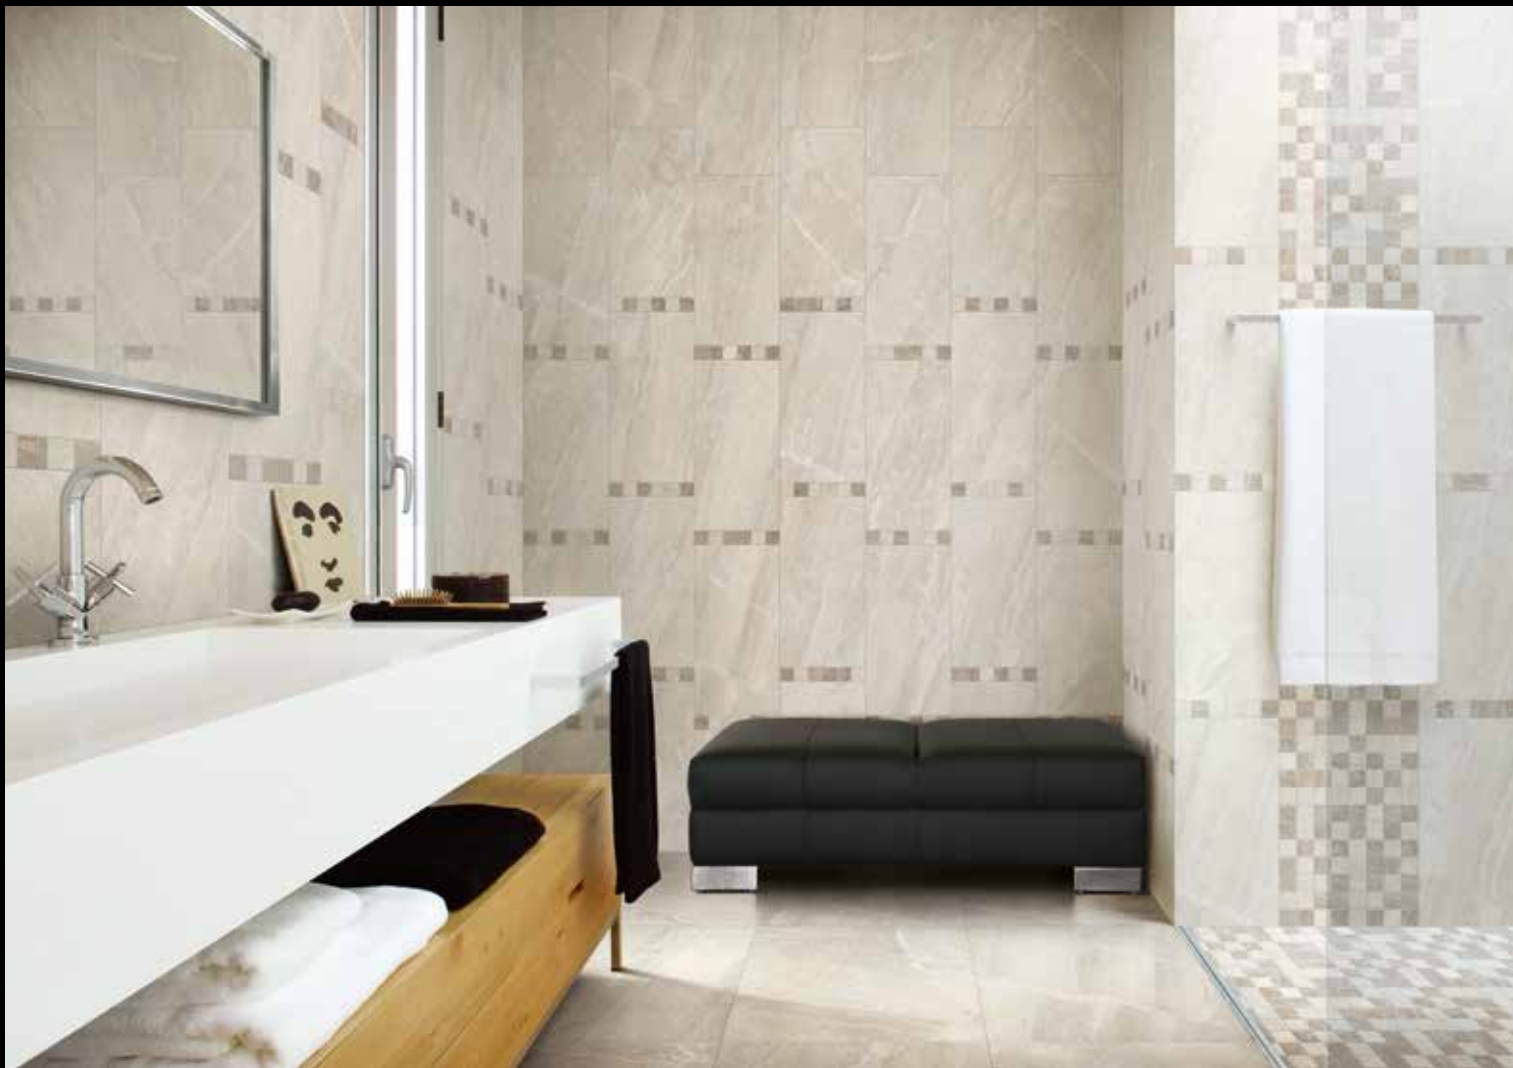

Flint Ivory: 60x60, 30x60, 4,7x4,7 mosaico Cream\_24"x24", 12"x24", 1.8"x1.8" Cream mosaic

**CERDIGITILES®**



DRY  
0.70  
WET  
0.72  
C.O.F.

— 0.52 —  
D. C.O.F.



RIVESTIMENTO

PAVIMENTO

MEDIA

IMPERMEABILE

INGELIVO

RESISTE

FACILE

A+B

R 10

C.O.F.

D. C.O.F.

RESISTE

POSA CON FUGA

# FLINT IVORY

BORDO RETTIFICATO - RECTIFIED EDGE



**61715** 60x60\_24"x24"



**61724** mosaico Cream  
4,7x4,7\_1.8"x1.8"  
Walnut + Ivory  
(su rete 30x30\_12"x12")



**61731** 4,8x60\_1.9"x24" battiscopa



**61719** 30x60\_12"x24"



**61727** 33x60\_13"x24" gradino costa retta





Flint Silver: 60x60\_24"x24"

**CERDIGITILES**



RIVESTIMENTO



PAVIMENTO



MEDIA



IMPERMEABILE



INGELIVO



RESISTE



FACILE



A+B



R 10



C.O.F.



D. C.O.F.



RESISTE



POSA CON FUGA

**FLINT SILVER**

BORDO RETTIFICATO - RECTIFIED EDGE



**61716** 60x60\_24"x24"



**61725** mosaico Ice  
4,7x4,7\_1.8"x1.8"  
White + Silver  
(su rete 30x30\_12"x12")



**61732** 4,8x60\_1.9"x24" battiscopa



**61720** 30x60\_12"x24"



**61728** 33x60\_13"x24" gradino costa retta





Flint White: 30x60\_12"x24"



RIVESTIMENTO

PAVIMENTO

MEDIA

IMPERMEABILE

INGELIVO

RESISTE

FACILE

A+B

R 10

C.O.F.

D.C.O.F.

RESISTE

POSA CON FUGA

# FLINT WHITE


BORDO RETTIFICATO - RECTIFIED EDGE



61718 60x60\_24"x24"



61725 mosaico Ice  
4,7x4,7\_1.8"x1.8"  
White + Silver  
(su rete 30x30\_12"x12")



61734 4,8x60\_1.9"x24" battiscopa



61722 30x60\_12"x24"



61730 33x60\_13"x24" gradino costa retta



formato cm size cm format cm Format cm	pezzi scatola pieces box pièces boîte Stück Karton	mq. scatola sq. mt. box mq. boîte Qm. Karton	kg. scatola weight box poids boîte Gewichte Karton	scatole pallet box pallet boîte pallet Karton Palette europallet 80x120	mq. pallet sq. mt. pallet mq. pallet Qm. Palette	kg. pallet weight pallet poids pallet Gewichte Palette
30x60	7	1,26	23,55	40	50,40	942,00
60x60	4	1,44	27,20	32	46,08	870,40
30x30 mosaico 4,7x4,7	6					
4,8x60 battiscopa	20	ml. 12,00	14,45			
33x60 gradino costa retta	4					

per comprensibili motivi tecnici i pesi sopra indicati possono variare del +/- 4% - for technical reasons the weights indicated above may vary +/- 4%



#### Cerindustries for LEED

LEED credits provide to architects, contractors etc. all the necessary means to evaluate the environmental sustainability of a given building. Leed provisions are based on the recognition/assignment criteria of credits pertaining to specific requirements of green building materials. The credits total amount does establish the certification ranking achieved by the building and concurs to raise the market perceived value. All Cerindustries' products do comply with many of LEED's requirements and in particular all products classified under category BLA, porcelain stoneware, contain a percentage of recycled and re-covered material, (pre-consumer), that does exceed 40% of the total quantity of clays employed. Cerindustries' products do not release VOCs and are produced in environmental friendly certified facilities.

Cerindustries S.p.A. products comply with the standards at present in force.

Any indications of weight, measurements, dimensions, colours, shades and other data contained in the Cerindustries S.p.A. illustrative material are merely indicative and must not be understood as binding. To enhance the effect of shaded materials it is recommended to alternate items from different boxes while laying. When laying ground products it is advisable to use a self-levelling floor plaster with joints of not less than 2 mm. Cerindustries S.p.A. do not accept responsibility for defects resulting from the incorrect laying of materials. Maximum care should be taken when handling and laying polished products, in particular avoiding rubbing the tiles against each other. When laying is complete it is advisable to protect the floor with cardboard up until completion of building work on the site. Owing to the special nature of these tiles we recommend that you quickly wipe the tiles with special detergents after stuccoing. Cerindustries S.p.A. reserves the right to modify the technical information reported on this catalogue. The colours and aesthetic features of the products are indicative, as it is not possible to reproduce them faithfully on paper.



**CERDOMUS**  
ceramiche

cerindustries s.p.a. 48014 castelbolognese ravenna italia via emilia ponente 1000 tel +39 0546 652111 fax +39 0546 50010  
www.cerdomus.com - info@cerdomus.com